

high penetration drilling
SOLUTIONS

www.alliedmachine.com

T-A Pro[®] Drill

Ø 9.50 mm - 47.80 mm (0.3739" - 1.8820")


NEW Y SERIES FOR THE SMALLEST DIAMETER YET!



Body diameter specific holders to *maximise rigidity* while drilling



Ease of insert selection with *ISO geometries* compared to T-A[®]

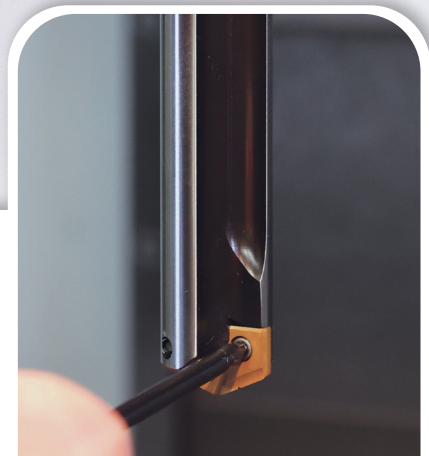

Consistency of a spade, with penetration rates of a *high performance* drill



**ALLIED MACHINE
& ENGINEERING**

www.alliedmachine.com


Allied Machine offers a wide range of drilling, boring, reaming, burnishing, and threading tools to lower your **cost per hole**.



REDESIGNED INSERTS

Ø 9.50 mm - 47.80 mm (0.3739" - 1.8820")


P



STEELS

- Designed to provide increased penetration rates and tool life in steel applications.
- Excellent chip control with superior geometry and edge.
- Increased heat resistance and improved tool life with Allied's multilayer AM300® coating.


K



CAST IRONS

- Uniquely designed for cast/nodular iron applications.
- Geometry that provides maximum tool life, reduced exit burr, and improved hole finish.
- Increased abrasion resistance and tool life with Allied's multilayer TiAlN coating.


N



NONFERROUS

- Designed for applications in aluminium, brass, and copper.
- Geometry that yields excellent chip control in these softer materials.
- TiCN coating for versatility to run in a variety of materials while reducing buildup.

M




Available in Z-3 series only

STAINLESS STEEL

- Designed for all stainless steels and heat resistant super alloy (HRSA) materials.
- Optimised geometry for improved chip formation while minimising exit burr.
- Industry leading tool life in stainless and HRSA materials with Allied's new AM460 coating.

X




SUBSTRATE FROM HIGH-SPEED STEEL

- Multipurpose geometry engineered for a wide range of materials
- Reliable tool life and high process repeatability in the most challenging applications
- Excellent heat resistance and high lubricity for broad scope use with Allied's multilayer AM200® coating

T-A Pro®

The **best** just got **BETTER.**


INSERT DESIGN
ISO-specific geometries with a new point design to **simplify** your insert choices



COOLANT DESIGN
Proprietary coolant outlet configuration provides **superior** cooling even in **low-coolant applications**



HOLDER DESIGN
Optimised flute design to **prevent chip packing** from slowing you down

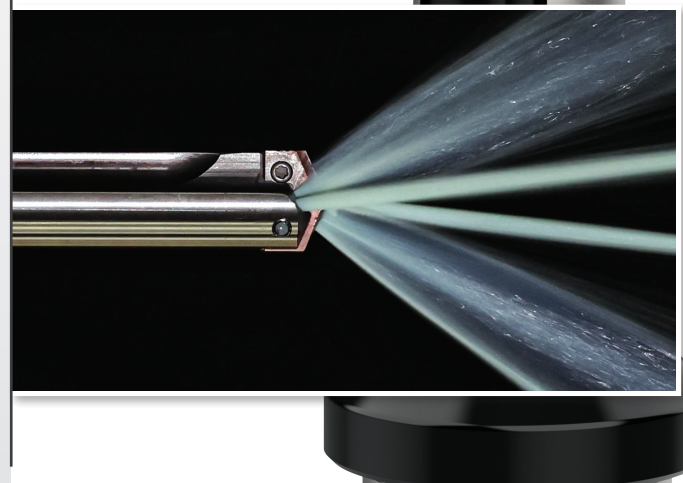

Allied Machine offers expert engineering support. Whether you need a quote, a test, or an application solution, a highly skilled and trained engineer is standing by, ready to help.
www.alliedmachine.com/contactus

Literature Order Number: TAPRO-FL-1_EU-EN

Copyright © 2024 Allied Machine and Engineering Corp. – All rights reserved.
All trademarks designated with the ® symbol are registered in the United States and other countries.

ALLIED MACHINE & ENGINEERING

WOHLHAUPTER®

Holemaking Solutions for Today's Manufacturing