

ACTIROX

AF979



VSM ACTIROX




Grain type	Ceramic
Bond	Full-resin bonded
Colour	Dark Petrol
Backing	Vulcanised fibre
Production width	1,470 mm

Materials




Features



Longer life: The heavy-duty variant of AF799 has an extremely long service life – while still achieving maximum stock removal, of course. AF979 demonstrates its full potential in applications such as bevelling, deburring, and preparing welded seams. Recommended for angle grinders in the upper power range.


Grit range:¹⁾



Benefits

- > Maximum stock removal thanks to geometrically shaped ceramic grain leads to a reduction in operating costs
- > More than twice as much stock removal compared to conventional ceramic grain abrasives
- > Significantly longer service life and fewer tool changes
- > Extremely stable dimensions and a durable vulcanized backing satisfy the highest safety requirements

Grain technology

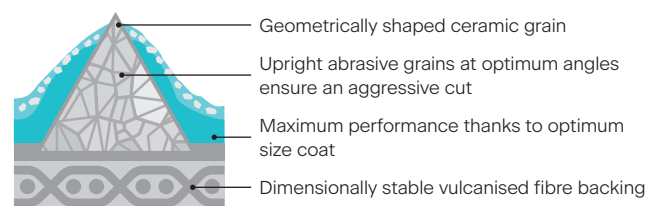

The plus in grinding performance

Practice has shown that **ACTIROX** abrasives have a **higher abrasive performance** than comparable conventional abrasives – with a consistent surface finish.

You achieve **higher stock removal** than you would expect with the specified grit size, but you do not get a rougher surface. A real plus for your grinding process.

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG
 Siegmundstraße 17 · 30165 Hanover · Germany
 T +49 511 3526 479 · F +49 511 3521 315
 sales@vsmabrasives.com · www.vsmabrasives.com



¹⁾ Further grit sizes upon request. Subject to technical changes.